


# GSD))) *i 70*


## GSDi Grade 2 Wireless Contact/Universal Sensor (GSDi-RF-CU-W)

### Main Features:

- Grade 2 Class II Contact & Universal Sensor
- Secure two-way encrypted wireless network
- Can be contact only and/or connected to a third party device independent of each other
- Terminal for interfacing an external device/detector with tamper input
- Has two reed switches- choice for left or right openings
- Front and back tamper
- Enrols on 1 or 2 zones
- Enrolling on 2 zones allows alarm verification
- Battery life is typically 3 years\*
- Transmits Alarm, Tamper, Low Battery and Supervisory conditions
- LED indicator in cover
- PCB in lid making battery changes easy
- Available in white or brown

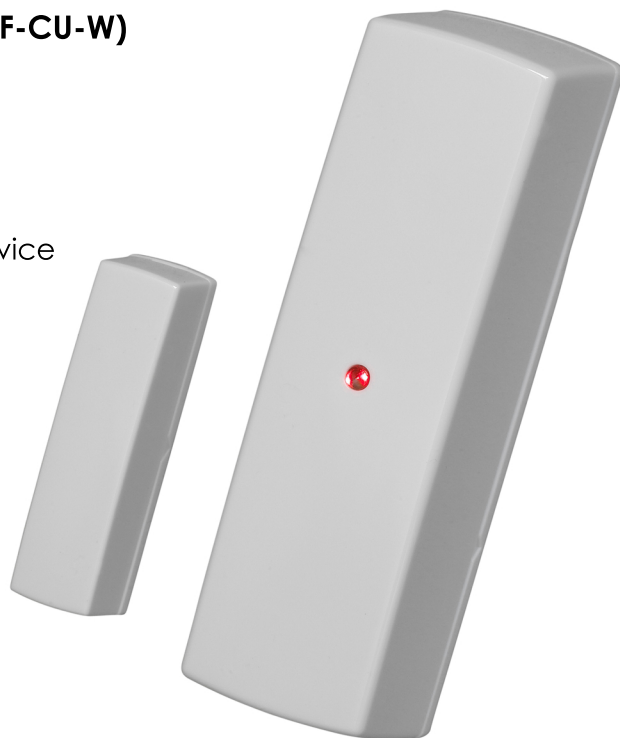

\*Battery life is based on the typical number of activations and in normal conditions

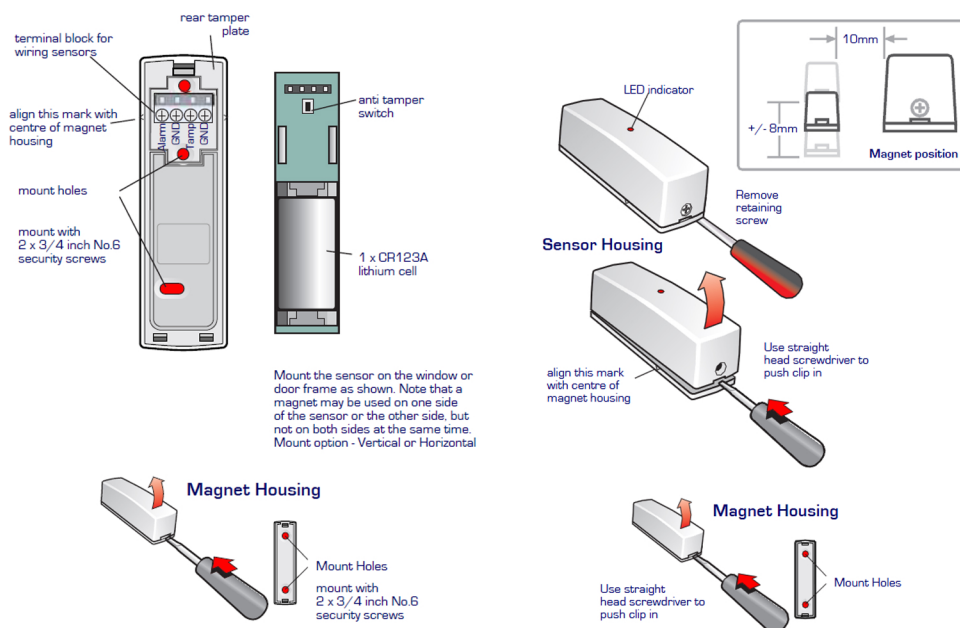

*Professional Wireless Security Products*

### Technical Specifications:

- Battery Type: 1 x DL123A 3V 1300mAh Lithium
- Indoor Use Only
- Dimensions:  
W. 27mm D. 29mm H. 90mm