


GSD))) i70





GSDi Grade 2 Wireless Shock/Contact Sensor (GSDi-RF-SGW)

Main Features:

- Grade 2 Class II Shock & Contact Sensor
- Secure two-way encrypted wireless network
- Can be Shock and/or Contact only
- Has two reed switches- choice for left or right openings
- Front and back tamper
- Enrolls on 1 or 2 zones
- Enrolling on 2 zones allows alarm verification
- Sensitivity of shock sensor, both pulse count and gross attack, are digitally adjusted from the GSD i70 - no need to open detector again until battery change solid state shock sensor element
- Accurate calibration of the detector during walk LED indicator in cover
- PCB in lid making battery changes easy
- Battery life 3 years*
- Transmits Alarm, Tamper, Low Battery and Supervisory conditions
- Available in white or brown

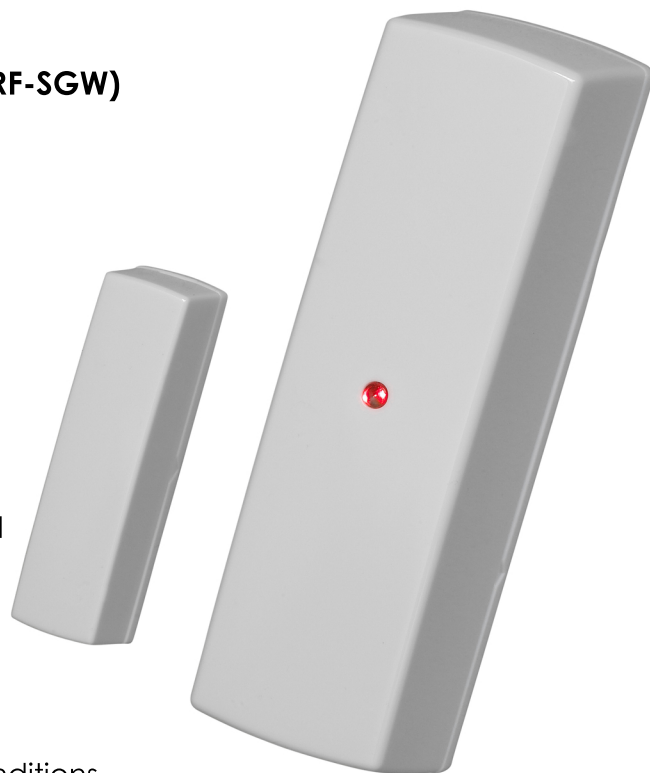

*Battery life is based on the typical number of activations and in normal conditions

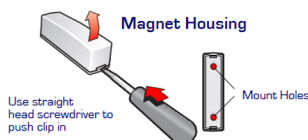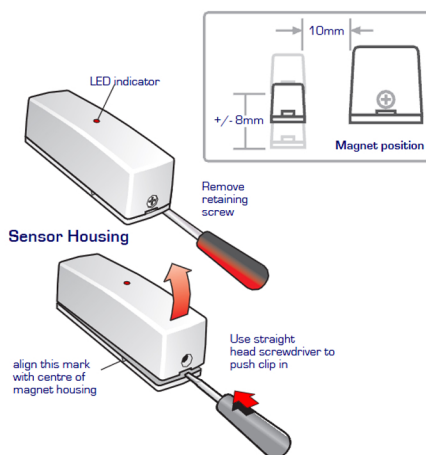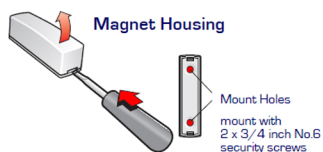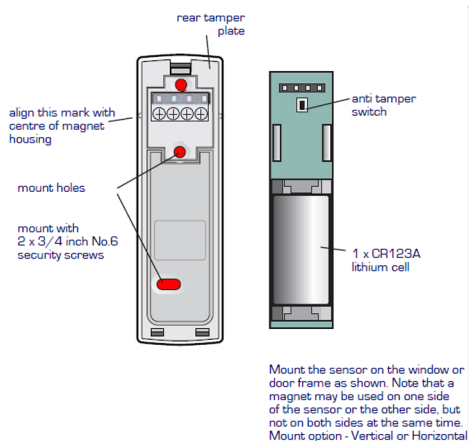

Professional Wireless Security Products

Technical Specifications:

- Battery Type: 1 x DL123A 3V 1300mAh Lithium
- Indoor Use Only
- Dimensions:
W. 27mm D. 29mm H. 90mm